

AL4

TELESCOPIC JIB 4T CAPACITY




HIGH-LIGHTS

- > **OPTIMIZED EQUIPMENT HEIGHT**
- > **OPTIMIZED WEIGHT** for maximum useful load
- > **MAGNETIZED REMOVABLE CONTROL** with digital screen
- > **SHOT BLASTING AND PAINTING BEFORE ASSEMBLY**
- > **CUSTOMIZATION:** color on demand and wide range of accessories
- > **ADAPTABLE TO ALL CHASSIS TYPES**

AL4

TELESCOPIC JIB
4T CAPACITY

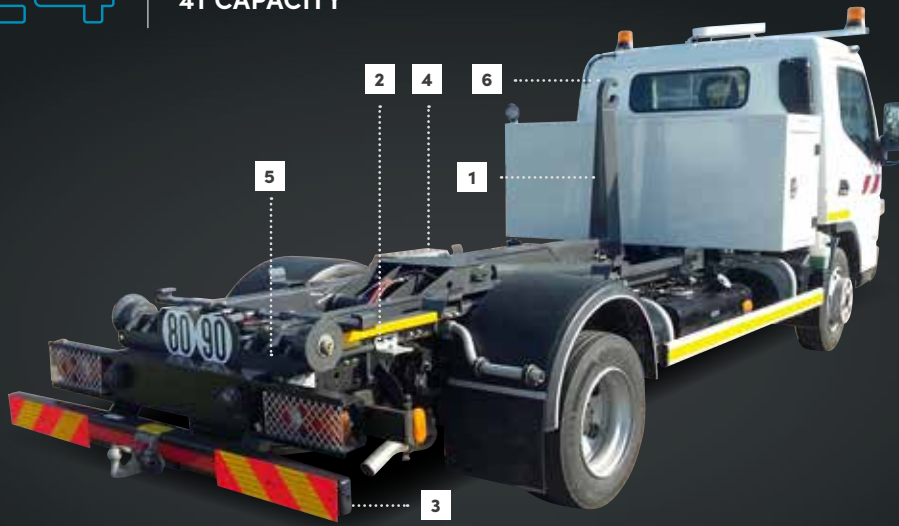

OPTIONS




Various hook heights from 920mm to 1570mm



Attachments brackets suited for various truck models



Extendable rear underrun protection



12V and 24V versions



Double track width 850 mm and 1060 mm






Mechanical safety latch

Other options available for custom configuration

FICHEPRODUIT/AL4/04/2021/500EN — ohistudio (fr)

TECHNICAL DATA

For GVW up to 7.5 T		A26	A27	A28	A29	A30	A31	A32	A33	A34	A35	A36
 Min. container length (mm)		2 300	2 300	2 300	2 600	2 600	2 600	2 600	2 900	2 900	2 900	2 900
 Max. container length (mm)		3 100	3 400	3 600	3 800	3 900	4 000	4 100	4 200	4 300	4 400	4 500
Container length with fixed RUP (mm)		2 800	2 900	3 000	3 100	3 200	3 300	3 400	3 500	3 600	3 700	3 800
 Weight (kg)		605	615	625	635	645	655	665	675	685	695	705

Subject to technical modification; data not binding.
Depending on the market. Chassis recommended.

AMPLIROLL® URBAN

+33 (0)4 77 36 28 28
42 avenue de Saint-Étienne – BP70056
42161 Andrézieux-Bouthéon cedex
FRANCE

  @marrelsas


MARREL
FASSI GROUP

MARREL.COM